

JMSH0802MTL

Product Summary

Parameters	Value	Unit
V_{DSS}	80	V
$V_{GS(th)_Typ}$	2.9	V
$I_D(@V_{GS}=10V)$	285	A
$R_{DS(ON)_Typ}(@V_{GS}=10V)$	1.4	m Ω

Ordering Information

Device	Marking	MSL	Form	Package	Reel(pcs)	Per Carton (pcs)
JMSH0802MTL-13	SH0802M	1	Tape&Reel	PowerJE@10x12	2000	10000

Absolute Maximum Ratings (@ $T_C = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Value	Unit
V_{DS}	Drain-to-Source Voltage	80	V
V_{GS}	Gate-to-Source Voltage	± 20	V
I_D	Continuous Drain Current	$\left. \begin{array}{l} T_C = 25^\circ\text{C} \\ T_C = 100^\circ\text{C} \end{array} \right\} \begin{array}{l} 285 \\ 202 \end{array}$	A
I_{DM}	Pulsed Drain Current ⁽¹⁾	Refer to Fig.4	A
E_{AS}	Single Pulsed Avalanche Energy ⁽²⁾	1423	mJ
P_D	Power Dissipation	$\left. \begin{array}{l} T_C = 25^\circ\text{C} \\ T_C = 100^\circ\text{C} \end{array} \right\} \begin{array}{l} 310 \\ 124 \end{array}$	W
T_J, T_{STG}	Junction & Storage Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Max	Unit
R - \$	Thermal Resistance, Junction to Ambient ⁽³⁾	34	$^\circ\text{C/W}$
R - &	Thermal Resistance, Junction to Case	0.4	

Electrical Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Conditions	Min.	Typ.	Max.	Unit
Off Characteristics					
$V_{(BR)DSS}$		80	-	-	V
I_{DSS}		-	-	1.0	μA
I_{GSS}		-	-	± 100	nA s
$V_{GS(th)}$		2.0	2.9	3.8	V
$R_{DS(ON)}$		-	1.4	2.0	m Ω
R_g		-	0.4	-	Ω
C_{iss}		6243	8740	11799	pF
C_{oss}		1257	1760	2376	pF
C_{rss}		19	26	35	pF
Q_g		91	128	173	nC
Q_{gs}		29	40	54	nC
Q_{gd}		18	26	44 n.	nC
$t_{d(on)}$		-	36	8 7	ns
t_r		-	38	-	ns
$t_{d(off)}$		-	87	-	ns
t_f					



Typical Performance Characteristics

Figure 1: Power De-rating



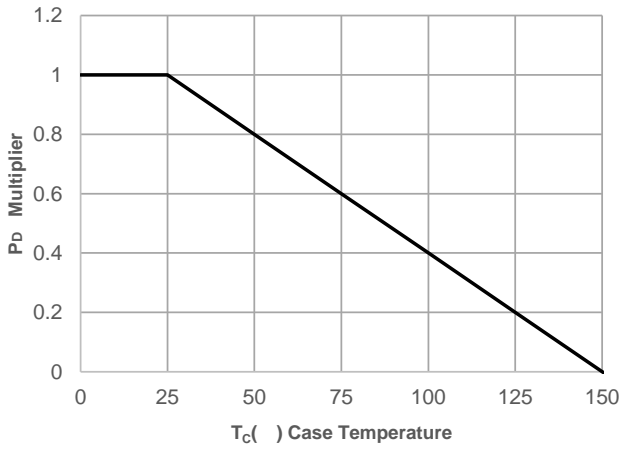


Figure 2: Current De-rating

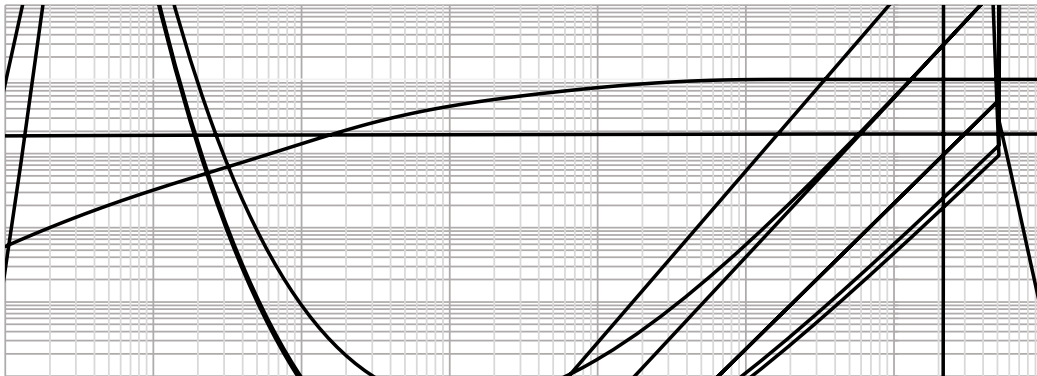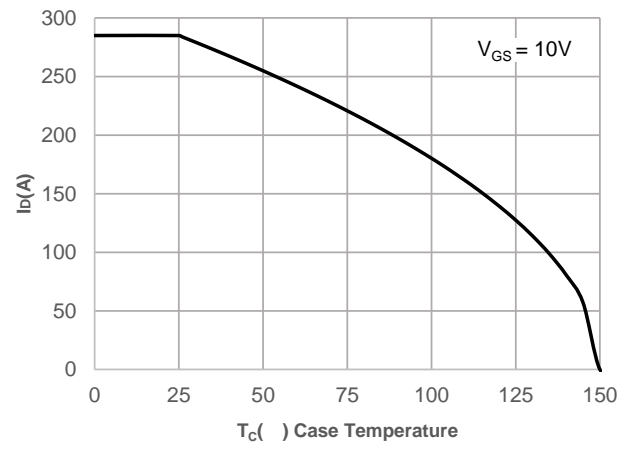

Typical Performance Characteristics

Figure 5: Output Characteristics



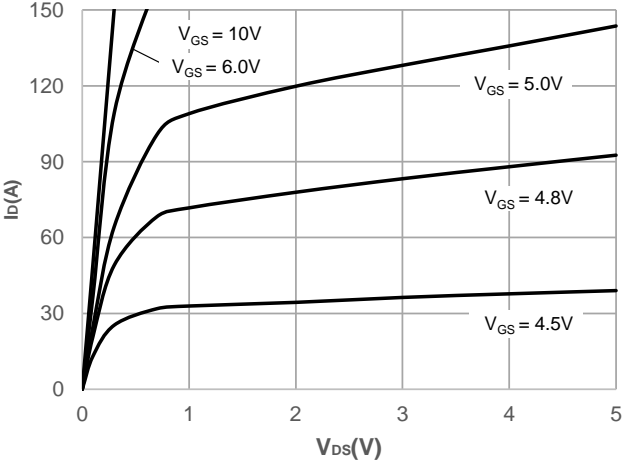


Figure 6: Typical Transfer Characteristics

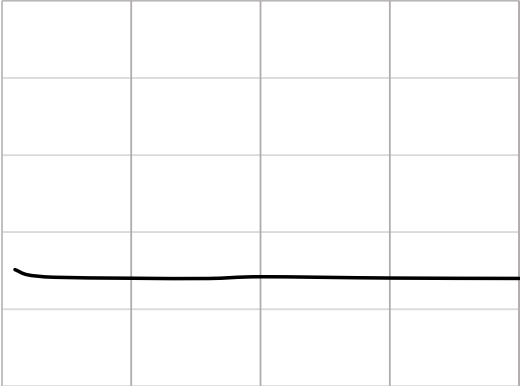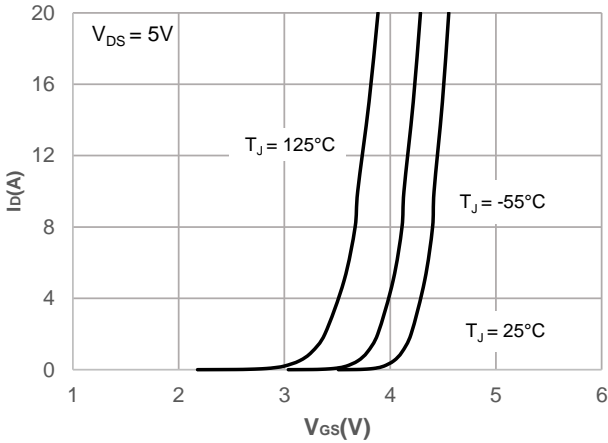

Test Circuit



Figure 1: Gate Charge Test Circuit & Waveform

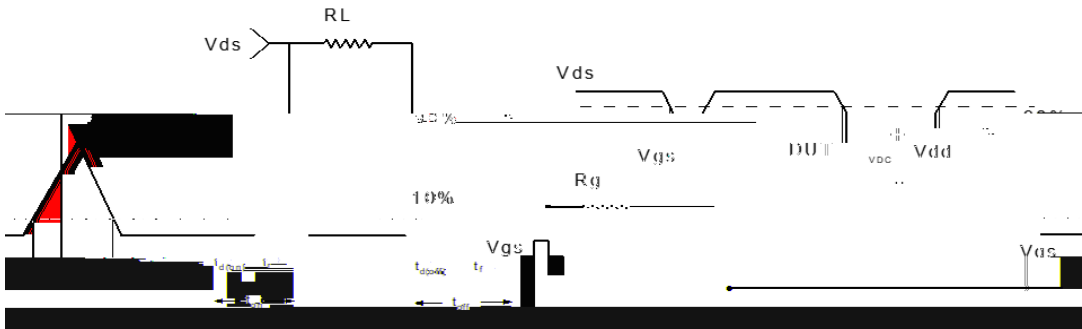


Figure 2: Resistive Switching Test Circuit & Waveform

