

	Outline	Reel Size	Reel(pcs)	Per Carton (pcs)
	TAPING	13"	4000	48000

Symbol		Units
$V_{DS}$		V
$V_{GS}$		V
	$T_A = 25^\circ\text{C}$	
	$T_A = 100^\circ\text{C}$	
$I_{DM}$		A
$E_{AS}$		mJ
$P_D$	$T_A = 25^\circ\text{C}$	W
R		$^\circ\text{C/W}$
$T_J, T_{STG}$		

# JMTP9435A



## Electrical Characteristics (T<sub>J</sub> = 25°C unless otherwise specified)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
<b>Off Characteristics</b>						
V <sub>(BR)DSS</sub>	Drain-Source Breakdown Voltage	I <sub>D</sub> = -250μA, V <sub>GS</sub> = 0V	-30	-	-	V
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> = -30V, V <sub>GS</sub> = 0V	-	-	-1.0	μA
I <sub>GSS</sub>	Gate-Body Leakage Current	V <sub>DS</sub> = 0V, V <sub>GS</sub> = ±20V	-	-	±100	nA
<b>On Characteristics</b>						
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = -250μA	-1.0	-1.8	-2.5	V
R <sub>DS(ON)</sub>	Static Drain-Source ON-Resistance <sup>(4)</sup>	V <sub>GS</sub> = -10V, I <sub>D</sub> = -5A	-	31	40	mΩ
		V <sub>GS</sub> = -4.5V, I <sub>D</sub> = -4A	-	46	60	mΩ
<b>Dynamic Characteristics</b>						
C <sub>iss</sub>	Input Capacitance	V <sub>GS</sub> = 0V, V <sub>DS</sub> = -15V, f = 1MHz	-	540	-	pF
C <sub>oss</sub>	Output Capacitance		-	75	-	pF
C <sub>riss</sub>	Reverse Transfer Capacitance		-	57	-	pF
Q <sub>g</sub>	Total Gate Charge	V <sub>GS</sub> = 0 to -10V V <sub>DS</sub> = -15V, I <sub>D</sub> = -2A	-	11	-	nC
Q <sub>gs</sub>	Gate Source Charge		-	2	-	nC
Q <sub>gd</sub>	Gate Drain("Miller") Charge		-	2	-	nC
<b>Switching Characteristics</b>						
t <sub>d(on)</sub>	Turn-On DelayTime	V <sub>GS</sub> = -10V, V <sub>DD</sub> = -15V I <sub>D</sub> = -2A, R <sub>GEN</sub> = 3Ω	-	3	-	ns
t <sub>r</sub>	Turn-On Rise Time		-	2	-	ns
t <sub>d(off)</sub>	Turn-Off DelayTime		-	26	-	ns
t <sub>f</sub>	Turn-Off Fall Time		-	15	-	ns
<b>Drain-Source Diode Characteristics and Max Ratings</b>						
I <sub>S</sub>	Maximum Continuous Drain to Source Diode Forward Current		-	-	-5.1	A
I <sub>SM</sub>	Maximum Pulsed Drain to Source Diode Forward Current		-	-	-20	A
V <sub>SD</sub>	Drain to Source Diode Forward Voltage	V <sub>GS</sub> = 0V, I <sub>S</sub> = -5.1A	-	-	-1.2	V
t <sub>rr</sub>	Body Diode Reverse Recovery Time	I <sub>F</sub> = -2A, di/dt = 100A/us	-	9	-	ns
Q <sub>rr</sub>	Body Diode Reverse Recovery Charge		-	3	-	nC

- Notes:
1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature.
  2. EAS condition: Starting T<sub>J</sub>=25°C, V<sub>DD</sub>=-15V, V<sub>G</sub>=-10V, R<sub>G</sub>=25ohm, L=0.5mH, I<sub>AS</sub>=-7A
  3. R<sub>θJC</sub> is measured with the device mounted on a 1inch<sup>2</sup> pad of 2oz copper FR4 PCB
  4. Pulse Test: Pulse Width 0.5%.

## Typical Performance Characteristics

Figure 1: Output Characteristics

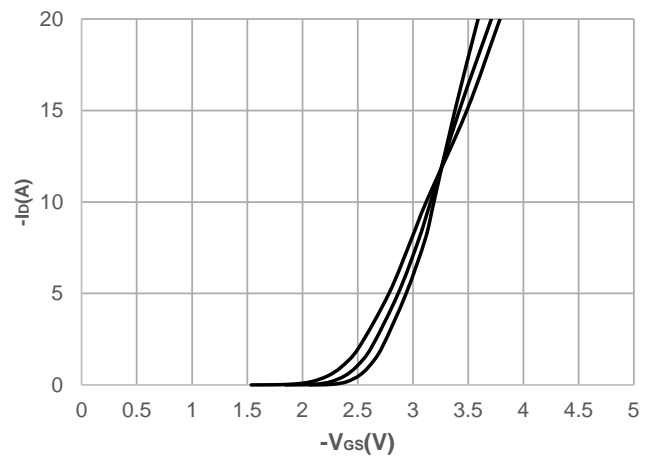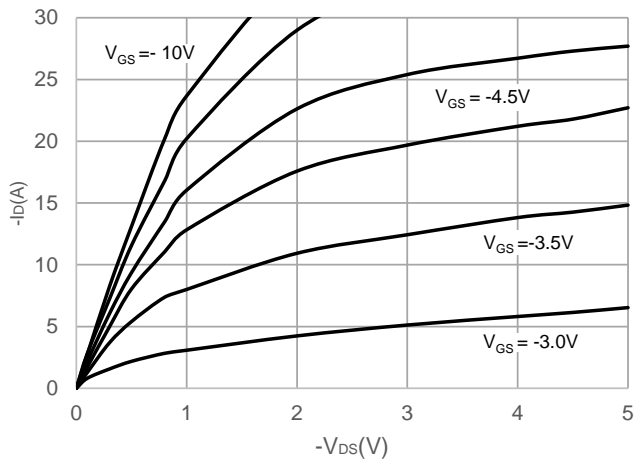



## Test Circuit

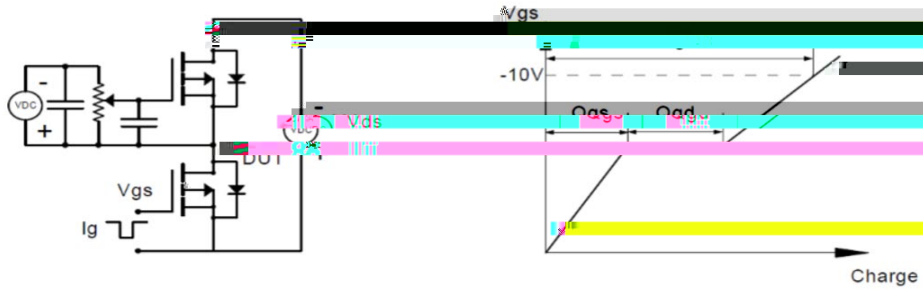


Figure 1: Gate Charge Test Circuit & Waveform



Figure 2: Resistive Switching Test Circuit & Waveform

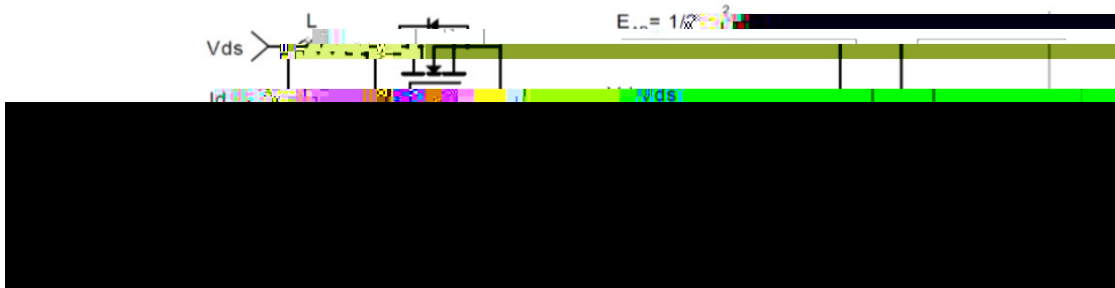


Figure 3: Unclamped Inductive Switching Test Circuit & Waveform

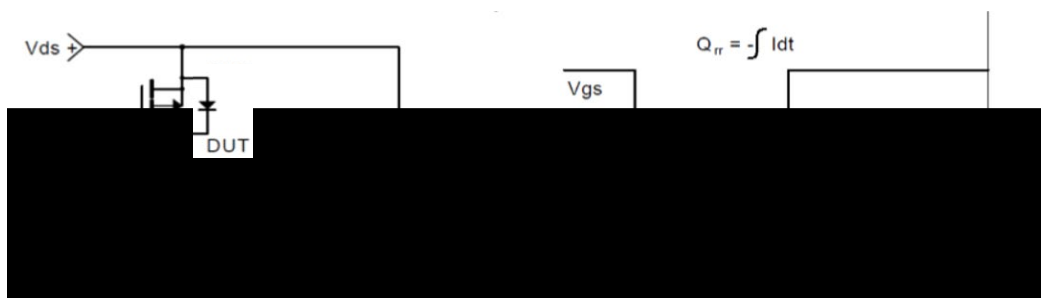


Figure 4: Diode Recovery Test Circuit & Waveform



## Package Mechanical Data(SOP-8)

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for the same.