




JIEJIE MICROELECTRONICS CO. , Ltd

MARKING

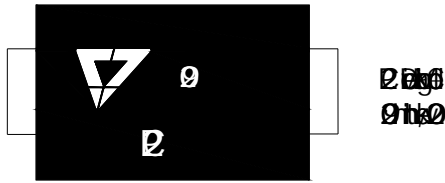

ELECTRICAL CHARACTERISTICS

P h	I _m @ V _m		V _s @ S		V _T @ T			I _H	C _o	M	
	A	V	V	A	V	A	A				β
	mA	mA	mA	mA	mA	mA	mA				mA
0 1		8	0 0	4	2	0	0 0				
0 1		2	0 0	4	2	0	0 0				
0 1		8	7 0	4	2	0	0 0				
0 1		5	8 0	4	2	0	0 0				
0 1		3	8 0	4	2	0	0 0				
0 1		0 0	0 0	4 2			0 0	0			
0 1		0 0	0 0	4 2			2	0 0	0		
0 1		0 0	0 0	4 2			2	0 0	0		
0 1		0 0	0 0	4 2			2	0 0	0		
0 1		0 0	0 0	4 2			2	0 0	0		
0 1		0 0	0 0	4 2			2	0 0	0		
0 1		2 0	0 0	4 2			2	0 0	0		
0 1		0 0	0 0	4 2			2	0 0	0		
0 1		0 0	0 0	4 2			2	0 0	0		

V_s is 100
0.1V

D W M W

SURGER RATINGS

S	I _P A			
	0 S	0 S	0 S	0 S

FIG.3: ~~Figure~~
in

0 0 0 0 0 0 0 0 0 0

TAPE AND REEL SPECIFICATION