




ACJT04F-800SW 4A TRIAC

Rev.A.1.1

DESCRIPTION:



| | | | |
|--|--|--|--|
| | | | |
| | | | |
| | | | |

ELECTRICAL CHARACTERISTICS

| Symbol | Test Condition | Quadrant | Value | Unit |
|--------|----------------|----------|-------|------|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |


STATIC CHARACTERISTICS

| Symbol | Parameter | Value(MAX.) | Unit |
|--------|-----------|-------------|------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

THERMAL RESISTANCES

| Symbol | Parameter | Value | Unit |
|--------|-----------|-------|------|
| | | | |
| | | | |

ORDERING INFORMATION

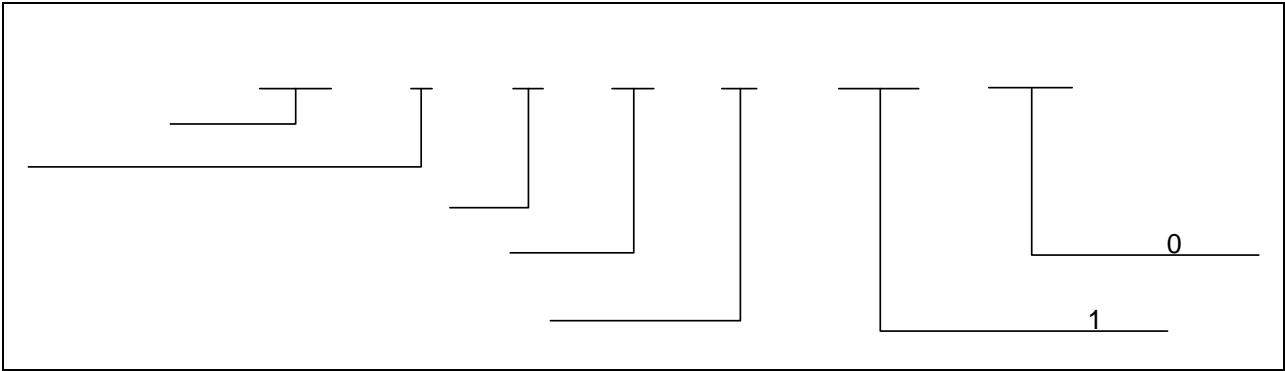

MARKING




FIG.1:



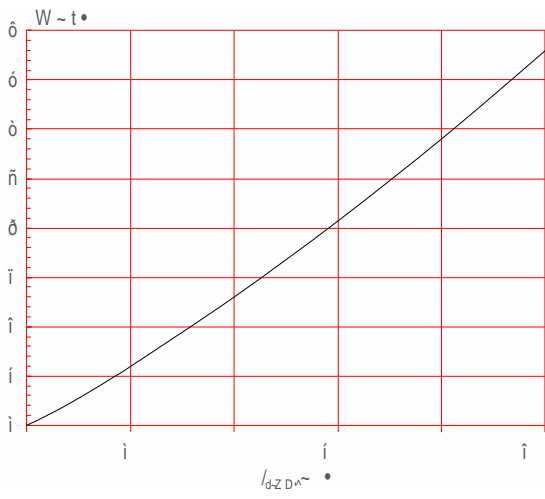


FIG.2:

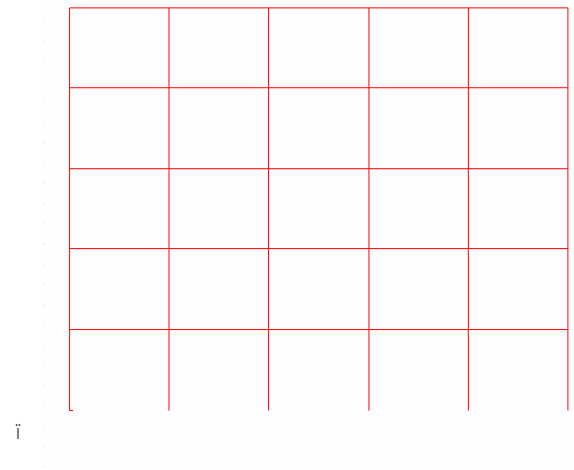

Ö

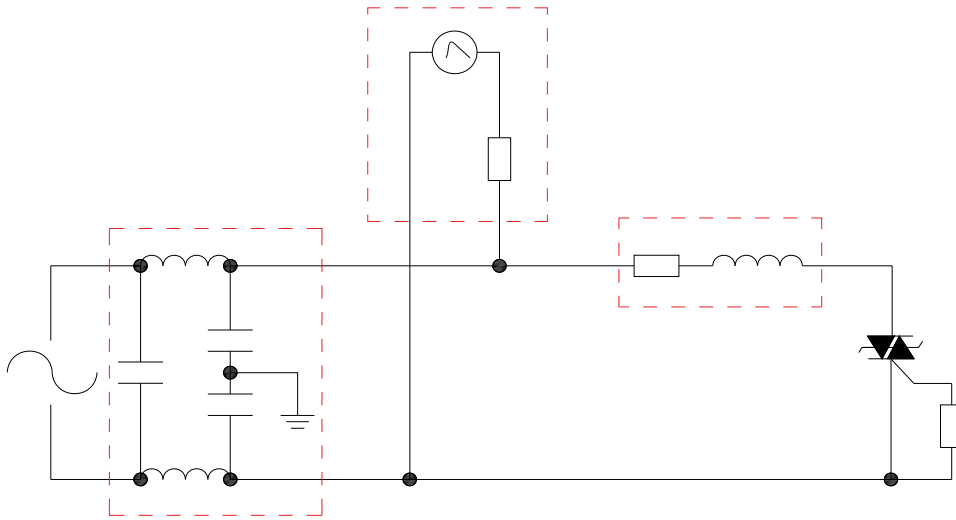

LEAD FORMING AND SOLDERING

D] œ } o š œ } v] • X

| | Package | Base qty. (pcs) | Delivery mode |
|--|--------------|--------------------|------------------|
| | TO-220F(Ins) | 50 | Tube |

on History

| |
|--|
| |
|--|

PACKAGE MECHANICAL DATA

