



JCT1275CS 75A SCR

RevA.1.1

DESCRIPTION:

With high ability to withstand the shock loading of large current, JCT1275CS SCR provides high dV/dt rate with strong resistance to electromagnetic interference. It is especially recommended for use on solid state relay, UPS, SVC, power charger, T-tools etc. Package TO-247S is RoHS compliant.

MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	75	A
V_{DRM}/V_{RRM}	1200	V
I_{GT}	10-80	mA

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage ($T_j=25^\circ C$)	V_{DRM}	1200	V
Repetitive peak reverse voltage ($T_j=25^\circ C$)	V_{RRM}	1200	V -RRM



Average gate power dissipation ($T_j=125^\circ\text{C}$)	$P_{G(AV)}$	1	W
Peak gate power	P_{GM}	22	W
Peak pulse voltage ($T_j=25^\circ\text{C}$; non-repetitive, off-state; FIG.7)	V_{pp}		

JCT1275CS



Jie Jie Mechanics Co., Ltd.

ORDERING INFORMATION

FIG.1: Maximum power dissipation versus
RMS on-state current

FIG.2: RMS on-state current versus case
temperature /





FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards.

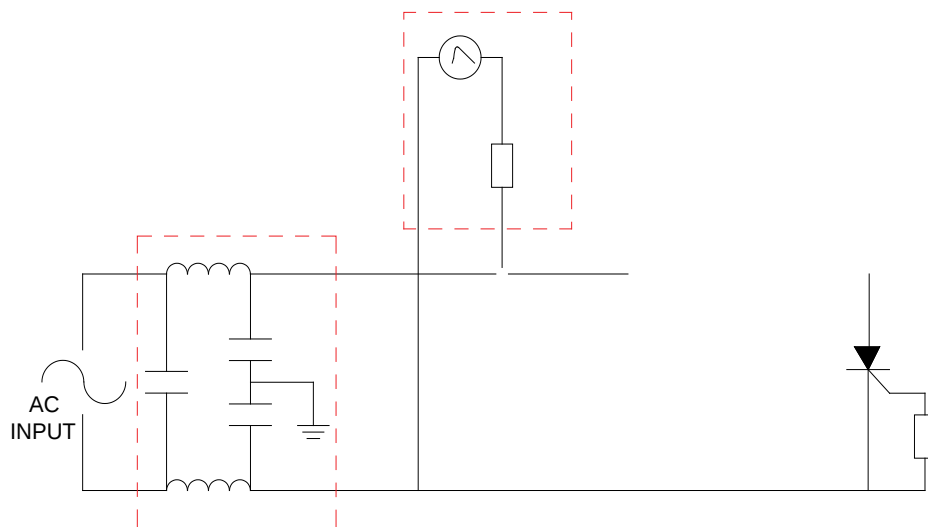

ORDERING INFORMATION

Order code	V _{DS} (V) V _{DSM} /V _{DSM} (V)	IGT (ns)	Package	Batch (pcs)	Delivery date
JCT1275CS	1200	10-80	TO-247S	30	10

Do not Re-use

Date	Revision	Changes
Apr.13, 2023	A.1.0	Last update
Oct.16, 2025	A.1.1	Revise PACKAGE MECHANICAL DATA

JCT1275CS



Jiè Jiè Mǐn ē lē c ō s

Co , Ltd .

PACKAGE MECHANICAL DATA

