



## JCT612TC 12A SCR

Rev.A.1.1

### DESCRIPTION:

JCT612TC silicon controlled rectifier is specifically designed for medium power switching and phase control applications. High current density due to mesa technology; SIPOS and Glass Passivation technology used has reliable operation up to 125 junction temperature. Low  $I_{GT}$  parts available. Package TO-220C is RoHS compliant.

### MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	12	A
$V_{DRM}/V_{RRM}$	600	V
$I_{GT}$	5	mA

### ABSOLUTE MAXIMUM RATINGS


Parameter	Symbol	Value	Unit
Storage junction temperature range	$T_{stg}$	-40-150	
Operating junction temperature range	$T_j$	-40-125	
Repetitive peak off-state voltage ( $T_j=25^\circ\text{C}$ )	$V_{DRM}$	600	V
Repetitive peak reverse voltage ( $T_j=25^\circ\text{C}$ )	$V_{RRM}$	600	V
Average on-state current ( $T_c=105^\circ\text{C}$ )	$I_{T(AV)}$	7.6	A
RMS on-state current ( $T_c=105^\circ\text{C}$ )	$I_{T(RMS)}$	12	A
Non repetitive surge peak on-state current ( $t_p=10\text{ms}, T_j=25^\circ\text{C}$ )	$I_{TSM}$	140	A
Non repetitive surge peak on-state current ( $t_p=8.14\text{ms}, T_j=100^\circ\text{C}$ )			

Average gate power dissipation ( $T_j=125$ )	$P_{G(AV)}$	1	W
Peak gate power	$P_{GM}$	10	W
Peak pulse voltage ( $T_j=25$ ; non-repetitive,off-state;FIG.7)	$V_{pp}$	0.5	kV

**ELECTRICAL CHARACTERISTICS** ( $T_j=25$  unless otherwise specified)

Symbol	Test Condition	Value			Unit
		MIN.	TYP.	MAX.	
$I_{GT}$	$V_D=12V$ $R_L=33$	-	-	5	mA


ORDERING INFORMATION

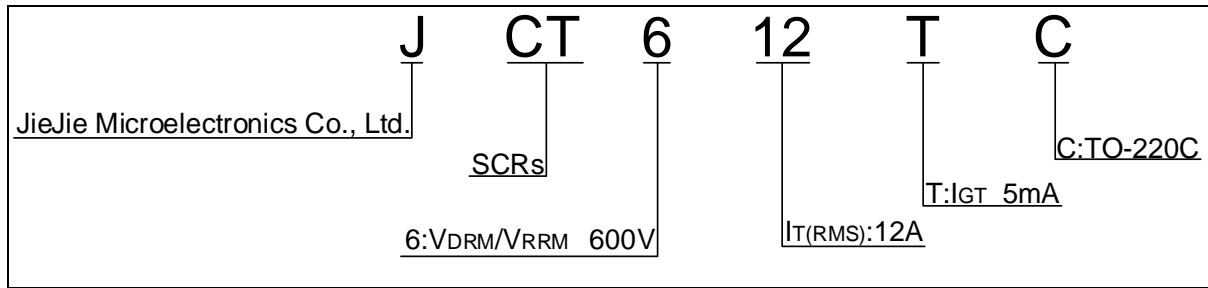

**JCT612TC**

**JieJie M**

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards.

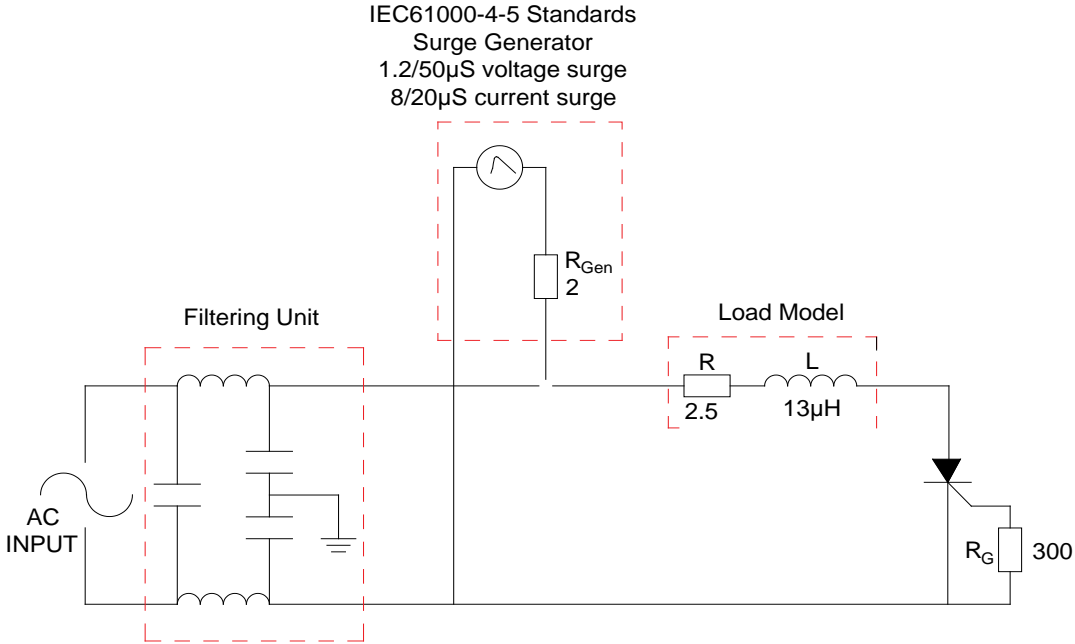

**ORDERING INFORMATION**

Order code	Voltage $V_{DRM}/V_{RRM}$ (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
JCT612TC	600	5	TO-220C	50	Tube

**Document Revision History**

Date	Revision	Changes
Apr.13, 2023	A.	

PACKAGE MECHANICAL DATA



