

# JIEJIE MICROELECTRONICS CO., LTD.

## TRIAC

Rev.A.1.1

This triac is suitable for general purpose AC switching applications. It can be used as an ON/OFF function in applications such as heating regulation, induction motor speed control, and phase control operation in light dimmers, fan speed controllers. Compared to traditional triacs, this triac has a very high switching capability up to 150°C. By using an external plastic package, it provides a rated insulation voltage of 600V, complying with UL standards (File ref: E252906). This triac is RoHS compliant.

## MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage temperature range	$T_{stg}$	-40-150	
Operating temperature range	$T_j$	-40-150	
Off-state voltage ( $T_j=25^\circ\text{C}$ )	$V_{DRM}$	600	V
Reverse voltage ( $T_j=25^\circ\text{C}$ )	$V_{RRM}$	600	V
Rated current ( $T_c = 106^\circ\text{C}$ )	$I_{T(RMS)}$	12	A
Surge peak on-state current (10ms, $T_j=25^\circ\text{C}$ )	$I_{TSM}$	120	A
Surge peak on-state current (6ms, $T_j=25^\circ\text{C}$ )		132	


Average gate power dissipation ( $T_j=150$ )	$P_{G(AV)}$	1	W
Peak gate power	$P_{GM}$	10	W
Peak pulse voltage ( $T_j=25$ ; non-repetitive, off-state; FIG.7)	$V_{pp}$	4.5	kV

**ELECTRICAL CHARACTERISTICS** ( $T_j=25$  unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
$I_{GT}$	$V_D=12V R_L=33$	- -	MAX.	35	mA
$V_{GT}$		- -	MAX.	1	V
$V_{GD}$	$V_D=V_{DRM} T_j=150$ $R_L=3.3k$	- -	MIN.	0.2	V



**FIG.1:** Maximum power dissipation versus RMS on-state current

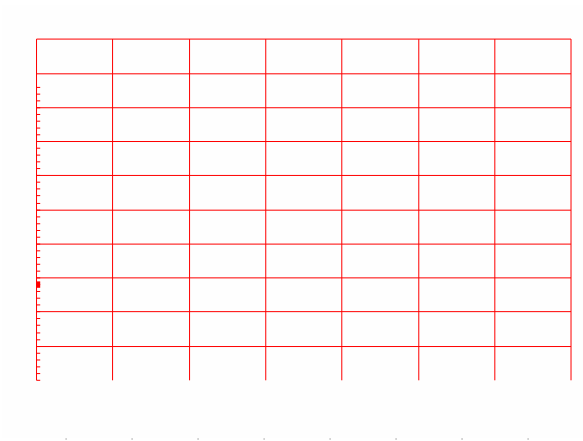

**FIG.2:** RMS on-state current versus case temperature

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards



## ORDERING INFORMATION

Order code	Voltage $V_{DRM}/V_{RRM}$ (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
T1235H-6F	600	35	TO-220F(Ins)	50	Tube

## Document Revision History

Date	Revision
------	----------

PACKAGE MECHANICAL DATA



Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.