









FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature




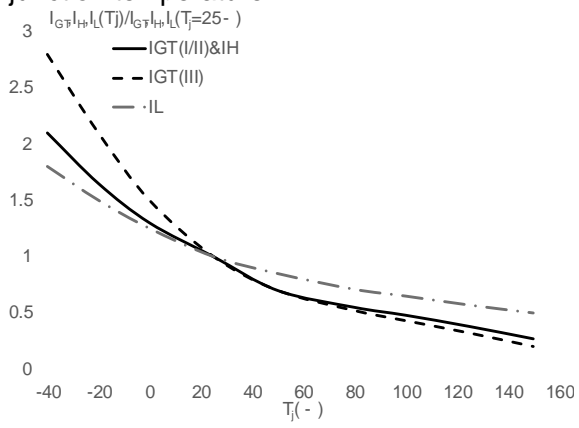


FIG.8 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards

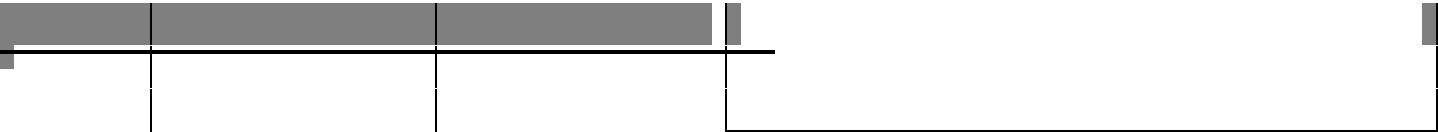

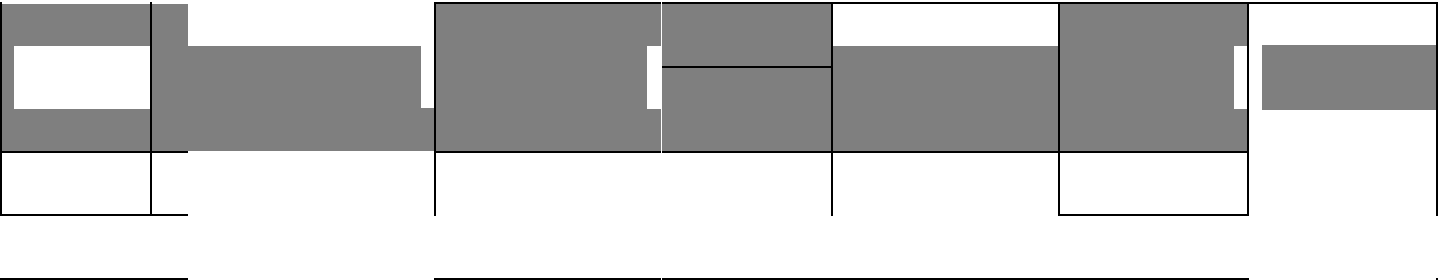


PACKAGE MECHANICAL DATA

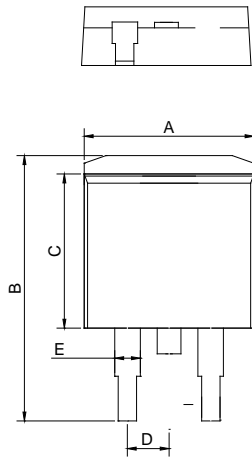

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.90		10.20	0.390		0.402
B	14.70		15.80	0.579		0.622
C	9.40		9.60	0.370		0.378
D	2.40			0.094		
E	1.20		1.50	0.047		0.059
F	0.75		0.85	0.029		0.033

T1610H-6E

DELIVERY MODE

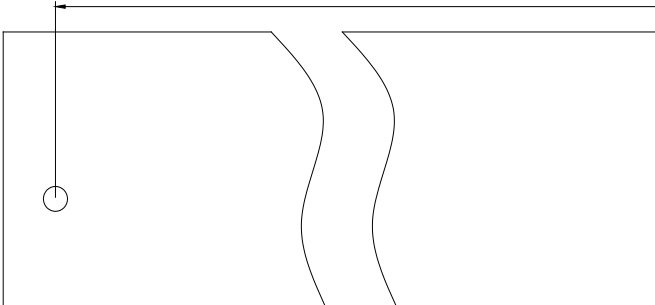

Information furnished in this document is believed to be accurate and reliable. However,