

JIEJIE MICROELECTRONICS CO., LTD.


Peak pulse voltage ($T_j=25$; non-repetitive, off-state; FIG.7)	V_{PP}	3.5	kV
--	----------	-----	----

ELECTRICAL CHARACTERISTICS ($T_j=25$ unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	$V_D=12V$ $R_L=33$	- -	MAX.	25	mA
				70	
V_{GT}	V_D	ALL	MAX.	1	V
V_{GD}					

FIG.1: Maximum power dissipation 39.6 W (u5) 11.6 W (u11.0) Tw Rpow 39.M04 3006 300.12 7-(M)4.5 W d [10

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

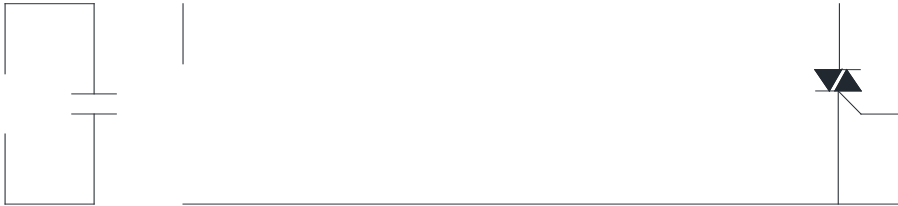

PACKAGE MECHANICAL DATA

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences L:/t. .