

JST138C-800E 12A TRIAC

Rev.A.1.1

DESCRIPTION:

The JST138C-800E triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. From T2 terminals to external heatsink. Package TO-220C is RoHS compliant.

MAIN Fct (Al)iant.

ELECTRICAL CHARACTERISTICS (unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I _{GT}	V _D =12V R _L =33	- -	MAX.	10	mA
				25	
V _{GT}		ALL	MAX.	1	V
V _{GD}	V _D =V _{DRM} T _J =125 R _L =3.3k	ALL	MIN.	0.2	V

ORDERING INFORMATION: JEDEC EIA-181C g' 159 ET Q 726.66(TO726.4303164 cm /

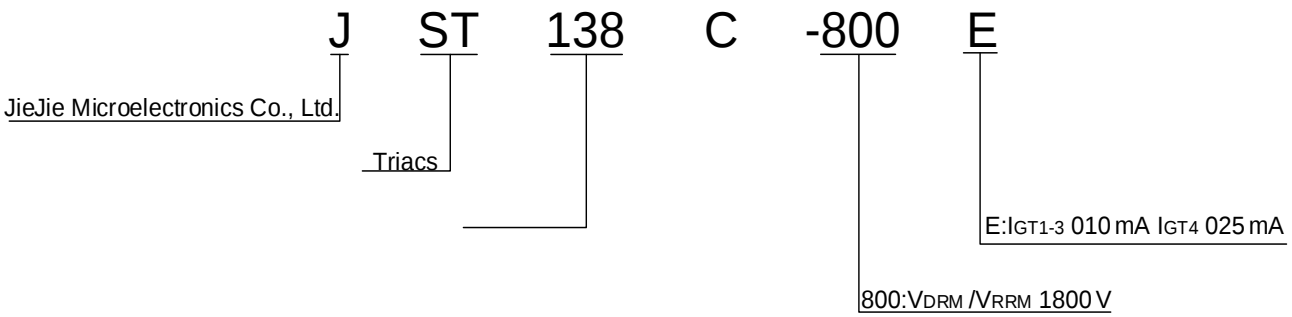


FIG.1: Maximum power dissipation versus RMS on-state current

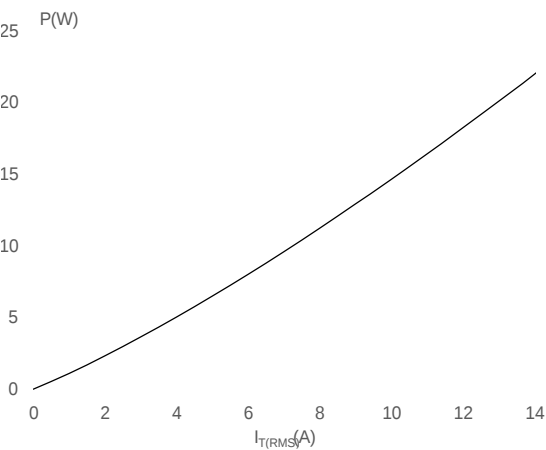


FIG.3: Surge peak on-state current versus number of cycles

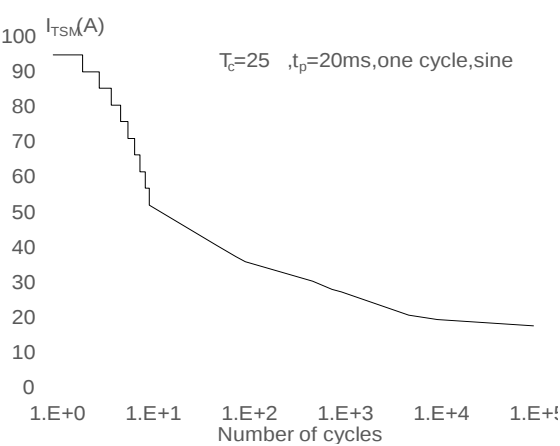


FIG.2: RMS on-state current versus case temperature


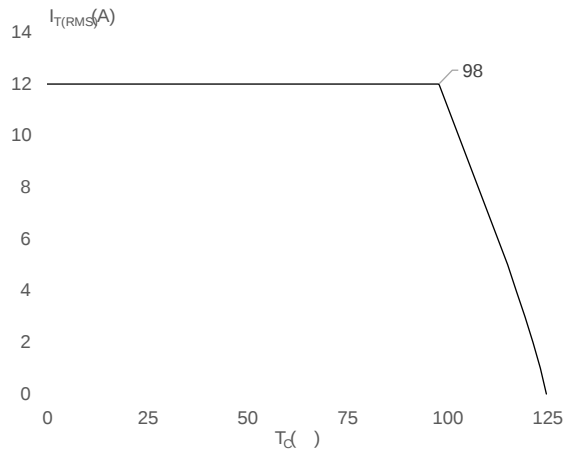


FIG.4: On-state character

FIG.7 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards

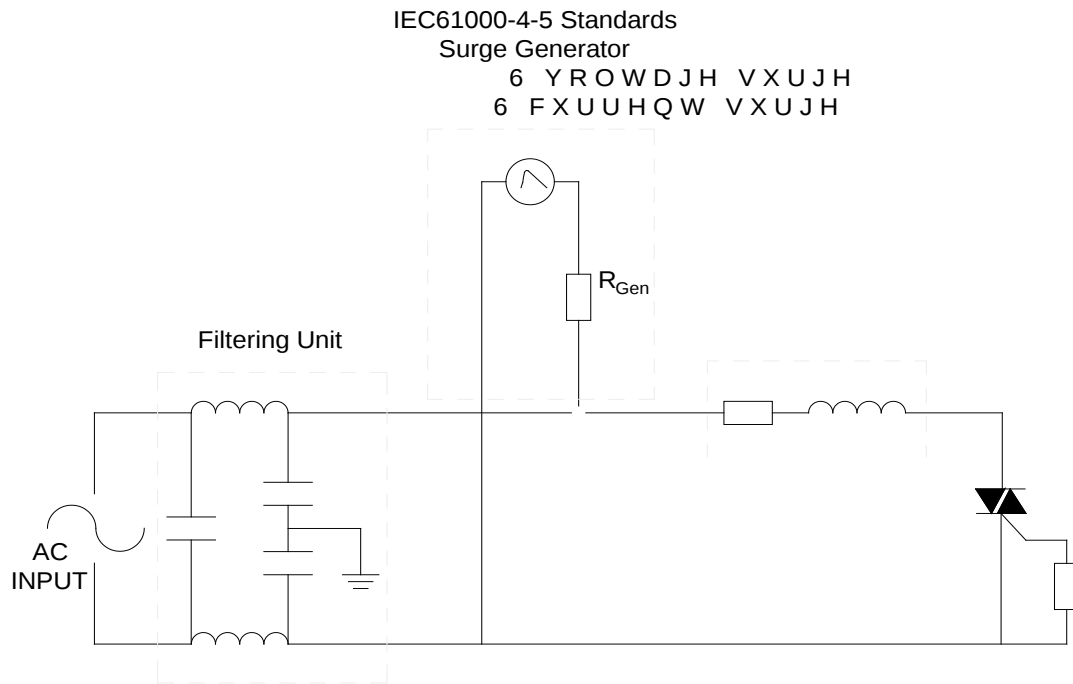

ORDERING INFORMATION

Order code	Voltage $V_{\text{DRM}}/V_{\text{RRM}}$ (V)	IGT(mA)		Package	Base qty. (pcs)	Delivery mode
		- -				
JST138C-800E	800	10	25	TO-220C	50	Tube

Document Revision History

Date	Revision	Changes
Apr.14, 2023	A.1.0	Last updated
Oct.16, 2025	A.1.1	Revise PACKAGE MECHANICAL DATA

PACKAGE MECHANICAL DATA



