

Peak pulse voltage (T _j =25 ; non-repetitive,off-state;FIG.8)	V _{pp}	2.5	kV
---	-----------------	-----	----

ELECTRICAL CHARACTERISTICS (S_j=15 unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I _{GT}	V _D =12V R _L =33	- -	MAX.	35	mA
V _{GT}		- -	MAX.	1	V _t

ORDERING INFORMATION

J	ST	24	E	-600	CW	-/
JieJie Microelectronics Co., Ltd.	Triacs	IT(RMS):25A	E:TO-263	600:VDRM /VRRM 1600 V	CW:IGT1-3 035 mA	Blank:Tube -TR:Tape & Reel

MARKING



 The diagram shows a TO-263 package triac. The top surface is marked with 'JST24E' and '600CW'. Below this is a stylized 'JJ' logo and a circle. At the bottom, there are two sets of 'XXX' markings.	XXX XXX Year _____ Month _____ Production Code
---	---

FIG.1: Maximum power dissipation versus RMS on-state current




FIG.2: RMS on-state current versus case temperature

FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

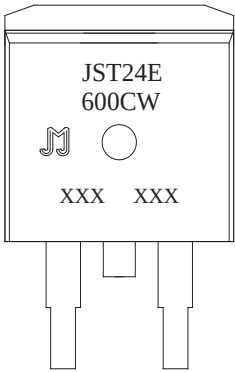

DELIVERY MODE

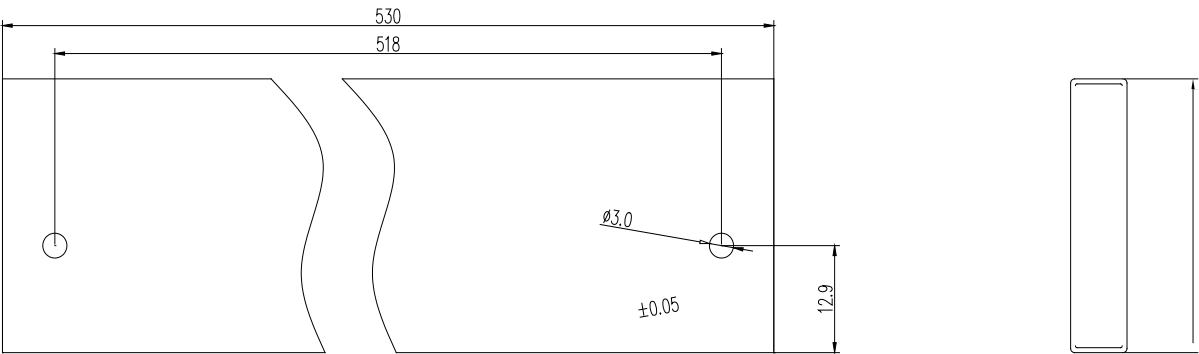

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright © 2025 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.