

ELECTRICAL CHARACTERISTICS (T_a=25℃ unless otherwise specified)

Symbol	Test Condition	Quadrant	Value	Unit
--------	----------------	----------	-------	------


	V _D =12V R _L =33Ω	- -	MAX. 50	mA mA mA8.08 0
--	---	-----	---------	----------------

ORDERING INFORMATION


	J	<u>ST</u>	41	SJ	<u>-600</u>	B

FIG.1: u6 (n 22 4(s)1 (ue Tw 10 0 Td ()Tj ET 55.25.3649.56 484.8

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

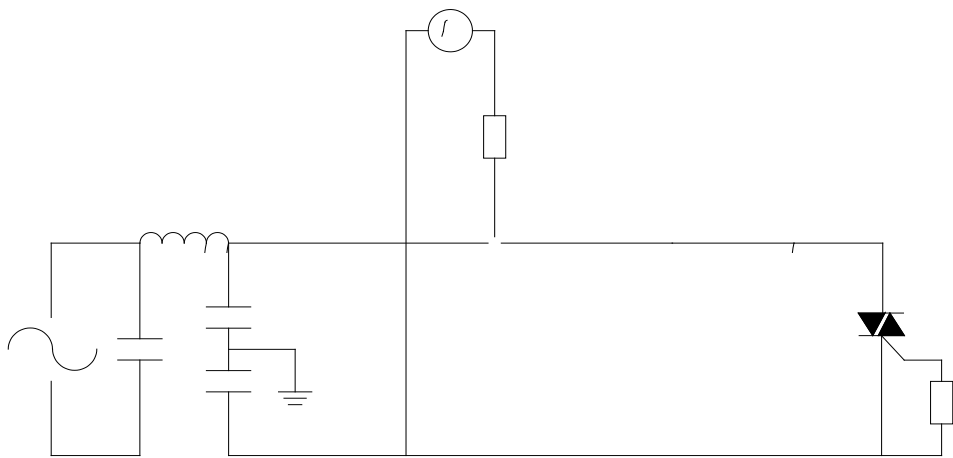

PACKAGE MECHANICAL DATA

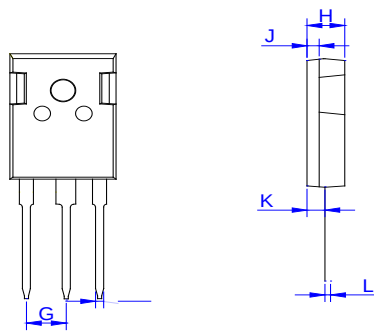

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	15.50		16.10	0.610		0.634
B1	3.10		3.50	0.122		0.138
C	19.70		20.30	0.776		0.799
D	2.90		3.30	0.114		0.130
E	1.90		2.30	0.075		0.091
F	1.00		1.40	0.039		0.055
G		5.44			0.214	
H	4.80		5.20	0.189		0.205
J	1.90		2.10	0.075		0.083
K	2.20		2.50	0.087		0.098
L	0.41		0.79	0.016		0.031

