



Ordering Information

Device	Marking	Package	Weight	Inner Box	Pre Carton
JMT50KT18T1	JMT50KT18T1	T1	100±5g/PCS	10 PCS	120 PCS

Typical Electrical & Thermal Characteristics

FIG.1:Power dissipation vs. on-state current

FIG.2: Maximum transient thermal impedance

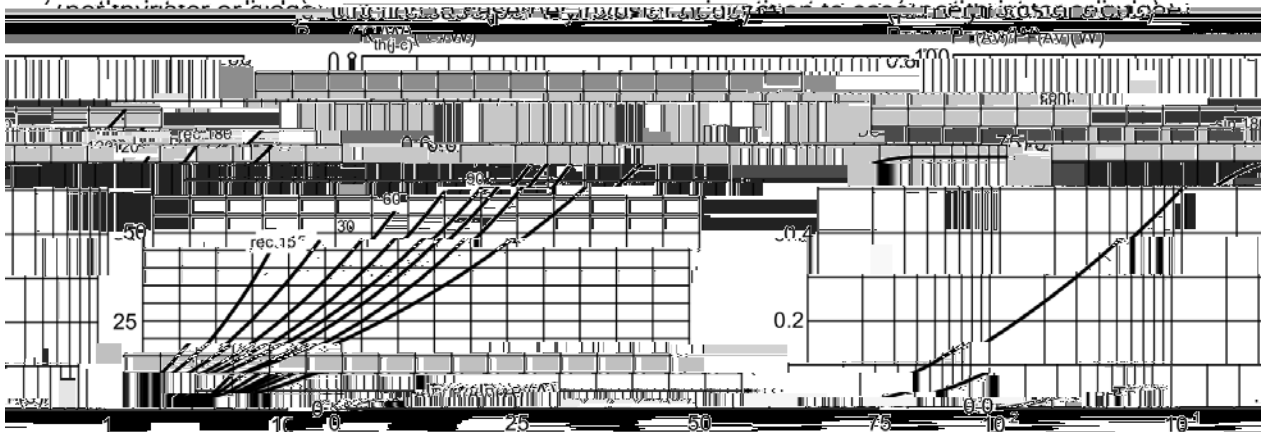


FIG.3:Forward characteristics
(per thyristor or diode)

FIG.4: Relative variations of gate trigger current, holding current and latching current versus junction temperature

