




EES1D  
SUPER FAST RECOVERY RECTIFIER

Rev.1.1

DESCRIPTION

— 封装 封装  
封装

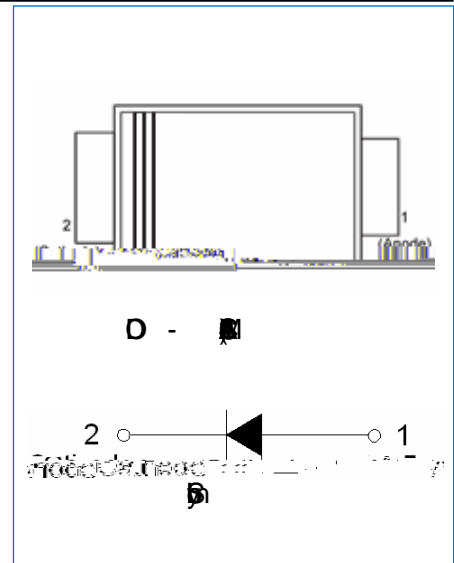


封装 封装 封装

Parameter		Symbol	EES1D	Unit
$V_{RRM}$	V	$V_{RRM}$	0	V
$V_{SM}$	V	$V_{SM}$	0	V
$V_{DRM}$	V	$V_{DRM}$	0	V
$I_{TSM}$	$I_{TSM}$	$I_{TSM}$	0	A
$I_{SM}$	$I_{SM}$	$I_{SM}$	5	A
$V_F$	$I_{FA}$	$V_F$	0	V
	$I_{FB}$		0	
$t_{rr}$	$I_{FA}$ $I_{FB}$ $r_{rr}$	$t_{rr}$	2	s
$I_R$	$T_{j2}$	$I_R$	0	A
	$T_{j0}$		0	A
$C_J$	$V_{RSM}$	$C_J$	5	pF
$T_j, T_{\theta}$		$T_j, T_{\theta}$	- 50	

THERMAL RESISTANCES

TAPE AND REEL SPECIFICATION-SMA

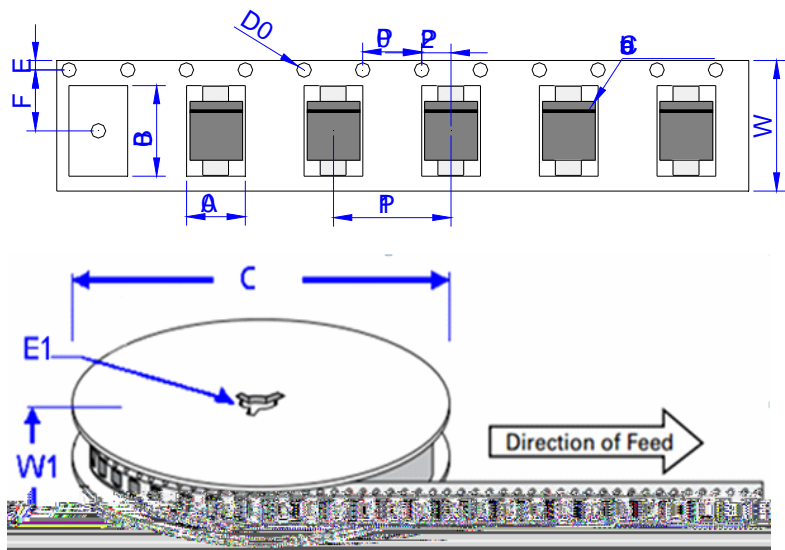

E	D	
	a	b
A	23	00
B	53	00
C	0	3
D	50	00
E	32	00
E	33	00
F	52	20
P	02	30
P	02	30
P	22	00
W	22	20
W	52	00

D	D	E	D	E
0	0	0	0	0

CHARACTERISTICS CURVE

