



**JEER1006KCT**  
**EPI SUPERFAST SOFT RECOVERY RECTIFIER**

Rev.1.5

**DESCRIPTION**

Plastic package has underwriters laboratory flammability classification 94V-0  
Lead free in comply with EU RoHS 2011/65/EU directives  
Low reverse leakage current  
Superfast recovery time and soft recovery characteristics  
Low recovery loss



**MECHANICAL DATA**

Case: TO-252 molded plastic over passivated junction  
Terminals: Solder plated, solderable per J-STD-002  
Weight:0.329gram



**ABSOLUTE MAXIMUM RATING** (Rating at 25 ambient temperature unless otherwise specified.)

Parameter
-----------



**JEER1006KCT**

CHARACTERISTICS CURVE

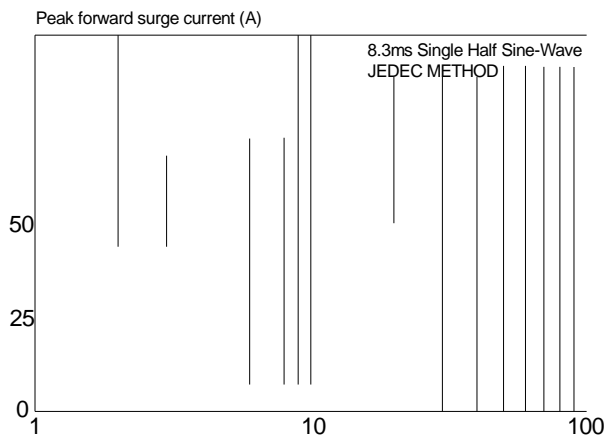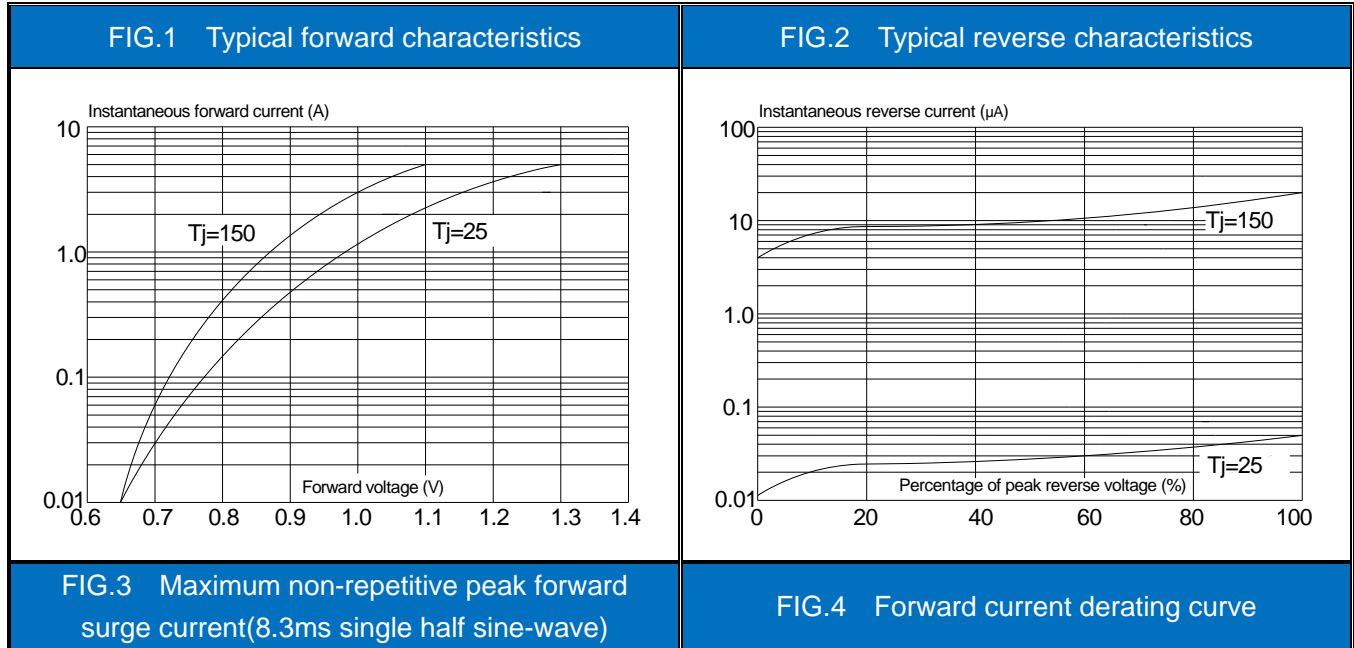

JieJie products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable JieJie product documentation. Warranties granted by JieJie shall be deemed void for products used for any purpose not expressly set forth in applicable JieJie documentation. JieJie shall not be liable for any claims or damages arising out of products used in applications not expressly intended by JieJie as set forth in applicable JieJie documentation. The sale and use of JieJie products is subject to JieJie terms and conditions of sale, unless otherwise agreed by JieJie.

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for sul n f o r m a t i o n m e n t i o n l e o u t h o t i c an agreement is signed, Jiangsu JieJie complies with the agreementm Products and information provided in this document have no infrio