




JSPJ5100A

5A Schottky Barrier Rectifier

Rev.1.2

DESCRIPTION

- Plastic package has underwriters laboratories flammability classification 94V-0
- For surface mounted applications in order to optimize board space
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Ultra low forward voltage drop
- Low power losses, high efficiency operation
- High current capability and surge capability
- Low thermal resistance package

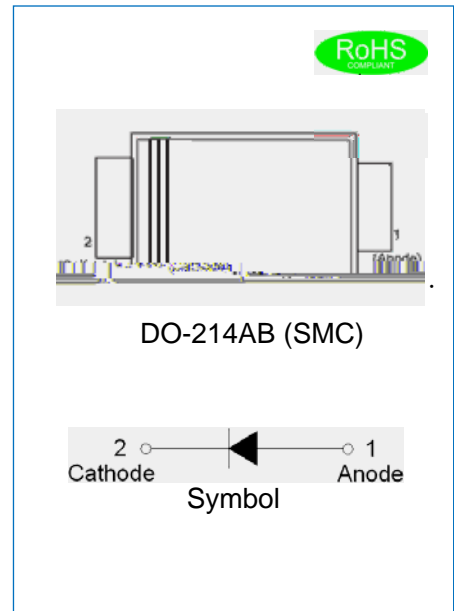

MECHANICAL DATA

- Case: SMC molded plastic
- Terminals: Solder plated, solderable per J-STD-002
- Polarity: Color band denotes cathode end

ABSOLUTE MAXIMUM RATING (Rating at 25 ambient temperature unless otherwise specified.)

Parameter	Symbol	JSPJ5100A	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	100	V
Maximum RMS voltage	V_{RMS}	70	V
Maximum DC blocking voltage	V_{DC}	100	V
Maximum average forward current	$I_{F(AV)}$	5.0	A
Peak forward surge current: 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	120	A
Operating junction temperature range	T_j	-55 to +150	
Storage temperature range	T_{stg}	-55 to +150	

ELECTRICAL CHARACTERISTICS (Rating at 25 ambient temperature unless otherwise specified.)

Parameter	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F=5A$ V_F			0.85	V
Reverse current at rated DC blocking voltage	$T_A=25$ I_R			0.1	mA
	$T_A=100$			15	
Junction capacitance	$V_R=4.0V, f=1MHz$ C_J		200		pF



THERMAL RESISTANCES

Symbol	Parameter	JSPJ5100A	Unit
$R_{th(j-a)}$	Thermal resistance from junction to ambient (note1)	35	/W


Note1 Thermal resistance from junction to ambient at 0.375"(9.5mm) lead length, P.C.B mounted

MARKING



The first '*'	Date code
The second '*'	
The third '*'	Batch code
The fourth '*'	
The fifth '*'	
J	Package: SMC
5	$I_{F(AV)}$:5A
10	V_{RRM} :100V


PACKAGE MECHANICAL DATA

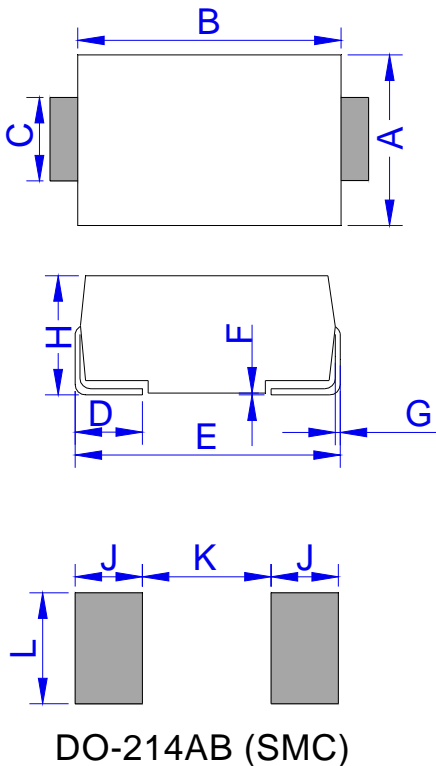

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	5.75	6.25	0.226	0.246
B	6.90	7.40	0.272	0.291
C	2.75	3.25	0.108	0.128
D	0.95	1.52	0.037	0.060
E	7.70	8.20	0.303	0.323
F	0.051	0.203	0.002	0.008
G	0.15	0.31	0.006	0.012
H	2.15	2.62	0.085	0.103
J	2.40		0.094	
K		4.20		0.165
L	3.30		0.130	




TAPE AND REEL SPECIFICATION-SMC

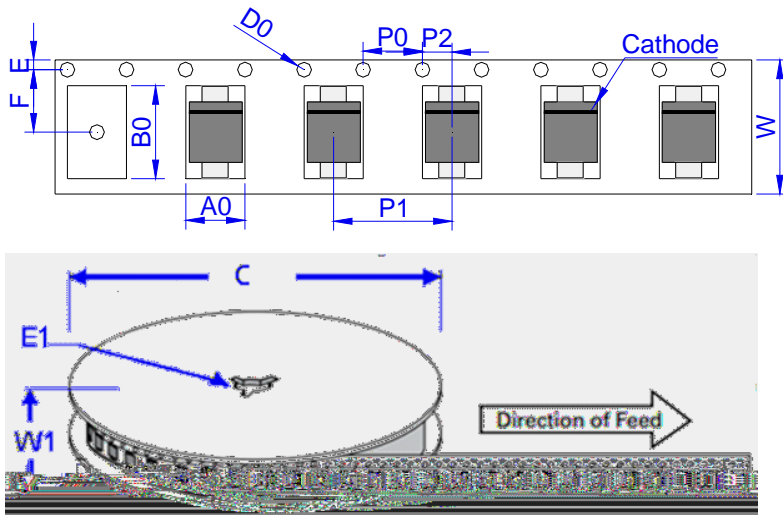

Ref.	Dimensions	
	Millimeters	Inches
A0	6.05 ± 0.3	0.238 ± 0.012
B0	8.31 ± 0.3	0.327 ± 0.012
C	330.0	13.0
D0	1.55 ± 0.1	0.061 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524 ± 0.012
F	7.50 ± 0.2	0.295 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	8.00 ± 0.2	0.3145 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	16.0 ± 0.2	0.630 ± 0.008
W1	19.7 ± 2.0	0.776 ± 0.079

OUTLINE	UNIT WEIGHT (g/PCS) typ.	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)
TAPING	0.26	3,000	48,000	330

CHARACTERISTICS CURVE

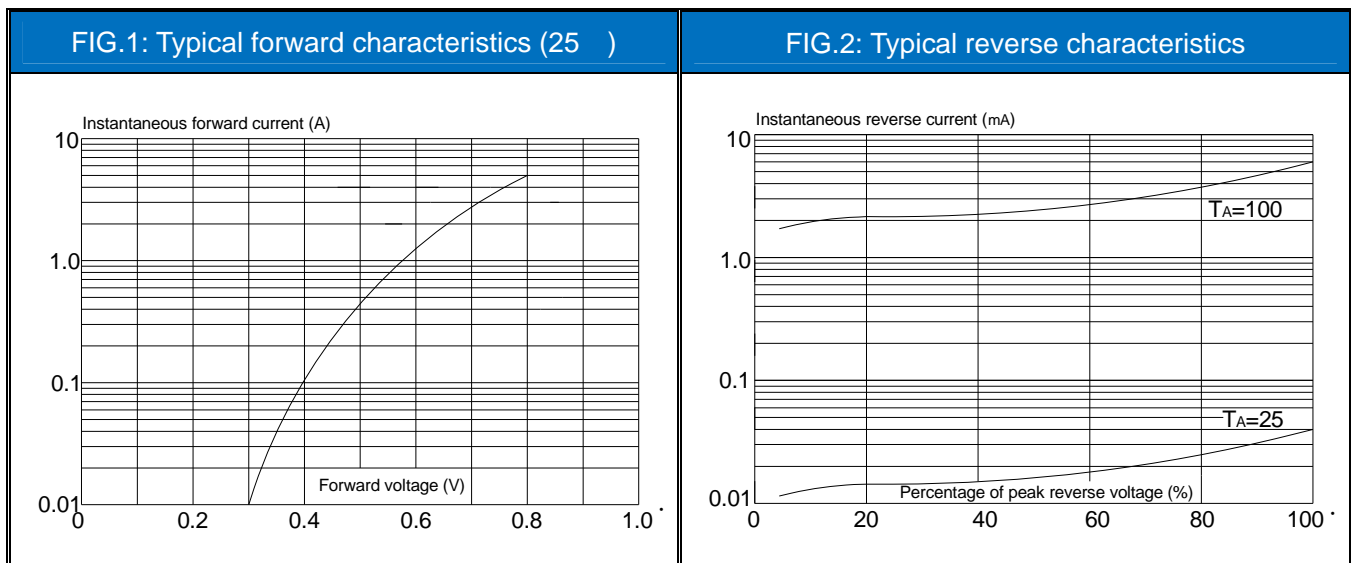



CHARACTERISTICS CURVE

FIG.3: Maximum non-repetitive peak forward surge current

FIG.4: Forward current derating curve