




RS3AB~RS3MB
FAST RECOVERY RECTIFIER

THERMAL RESISTANCES

Symbol	Parameter	RS3AB	RS3BB	RS3DB	RS3GB	RS3JB	RS3KB	RS3MB	Unit
$R_{th(j-L)}$	Junction to lead(note1)	18							/W

Note1 Thermal resistance from junction to lead mounted on P.C.B. with 7.0 mm x 7.0 mm copper pad areas.

TAPE AND REEL SPECIFICATION-SMB

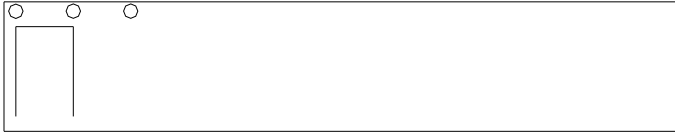

CHARACTERISTICS CURVE

FIG.1: Typical forward characteristics (25)	FIG.2: Typical reverse characteristics
,) \$ # 9) 9	Ö X \$ Ö X \$